

TE 626 3D A8

made of solid stainless steel for unrebated high performance heavy-duty doors with claddings up to 8 mm on both sides



Product features

- material stainless steel
- claddings up to 8 mm
- completely concealed hinge system
- for timber, steel or aluminium frames
- for unrebated heavy-duty doors
- sideways closed hinge body for an aesthetically pleasing mortise appearance
- comfortable 3D adjustment (side +/- 3.0 mm, height +/- 3.0 mm, compression +/- 1.0 mm)
- maintenance-free slide bearings


Technical data

Property	Value
Load capacity	300.0 kg
Overall length	240.0 mm
Width (door part)	32.0 mm
Width (frame part)	32.0 mm
Min. door thickness	49.0 mm (incl. claddings)
Cutter diameter	24.0 mm
Collar ring diameter	30.0 mm

Quality marks



UL certification

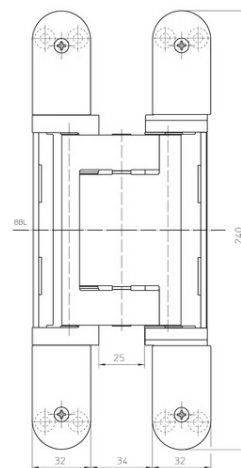

front view

TECTUS - TE 626 3D A8

Opening angle	180°
---------------	------

Notes

The load capacity mentioned above refers to two hinges per door leaf (1 x 2 m). Also the load capacities of the respective combined receiver have to be taken into consideration. For detailed information please look at the chapter [technical information](#).

With an opening position of 180° the door may have to be fixed additionally.

The suitability for fire doors depends on the door construction.

Installation tools

Universal milling frame

Template 5 250659 5 step 1

Template 5 250688 5 step 3 (without cladding)

Template 5 250689 5 step 2

Template 5 250690 5 step 3

Combinations

TE 640 3D FZ

TE 626 3D A8 BW/1

TE 640 3D A8 SZ

TE 640 3D ST

Cover plate set TECTUS A8 radius

Function range

burglar
resistance




fire resistance




smoke
resistance




soundproof

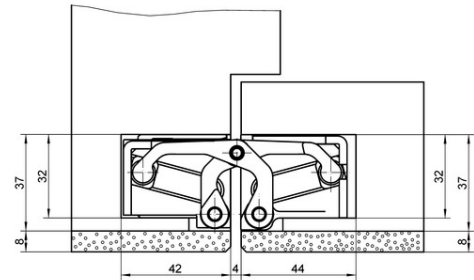

cross section

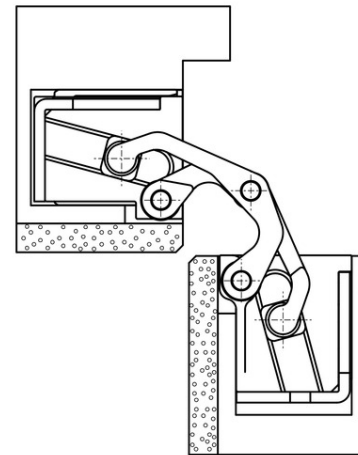

block frame 90°

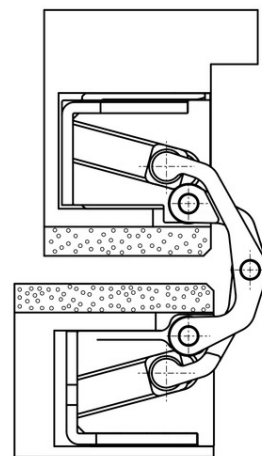

block frame 180°

TECTUS - TE 626 3D A8**Item versions**

Finish	Satin Stainless Steel (SW 040)
VPE	pack of 2
DIN	DIN right and left hand
ITEM NO.	5 400675 0 04002
ITEM NO. (SAP)	500003888
EAN	4015471123550