

V 0086 WF

door part for rebated flush doors



Technical data

Property	Value
Load capacity	70.0 kg
Knuckle Diameter	15.0 mm
Pin diameter	8.0 mm
Cutter diameter	20.0 mm
Collar ring diameter	30.0 mm
Material thickness	2.5 mm
Screws	4.5 x 50.0 mm



Notes

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter [technical information](#).

Load capacity applies only to the listed frame parts.

Also available with security pin (MSTS).

Installation tools

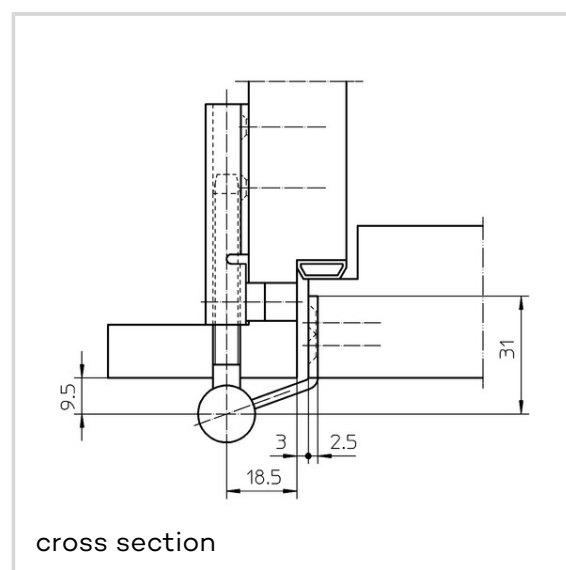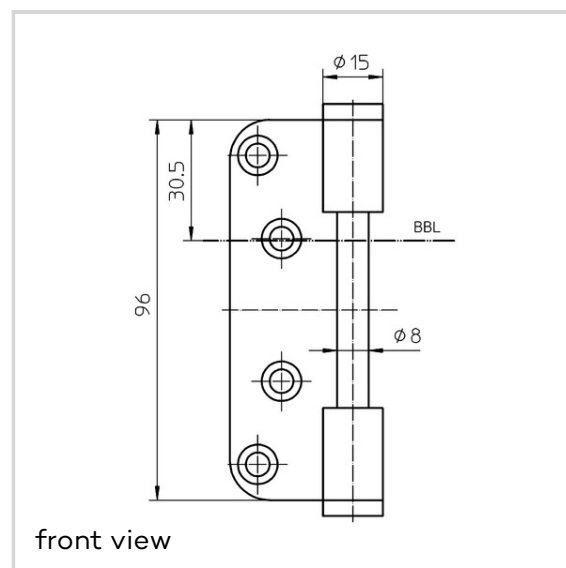

VARIANT V - V 0086 WF

Universal milling frame

Combinations

V 4200 WF
V 4400 WF
V 4400 WF 3 NUV
V 4400 WF 4 NOV
V 4400 WF 4 NUV
V 4700 WF
V 7900 WF VX-1
V 8000 WF ASR
V 8000 WF
V 8000 WF 4 NOV/NUV
V 8000/18 WF
V 8000/30 WF
V 8000 WF U
V 8000 WF GA
V 4700 WF FV

Item versions

Finish	Nickelled (SW 015)
VPE	pack of 20
DIN	DIN right and left hand
ITEM NO.	5 010062 0 01507
ITEM NO. (SAP)	5000000039
EAN	4015471004347