

MULTI 2D VN 5046

for flush aluminium and steel doors



Product features

- for flush aluminium and steel doors
- continuous 2D adjustment (side +/- 3.0 mm, height +/- 4.0 mm)

Technical data

Property	Value
Load capacity	100.0 kg
Knuckle length	100.0 mm
Knuckle Diameter	20.0 mm
Pin diameter	10.0 mm

Notes

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter [technical information](#).

Also available with security pin (MSTS).

Quality marks



CE certification



IFT certification

Classification code

EN 1935 / EAD

4	7	5	1 ^{*1}	1	— ^{*2}	1	12
---	---	---	-----------------	---	-----------------	---	----

^{*1} Test evidence for functional doors to be achieved with full door sets and assemblies.

^{*2} depending on the finish


VARIANT VN - MULTI 2D VN 5046**Installation tools**

Drilling jig VARIANT MULTI
2D VN 5046


Item versions

Finish	Blue galvanised (SW 010)
VPE	pack of 20
DIN	DIN right and left hand
ITEM NO.	5 030818 0 01007
ITEM NO. (SAP)	5000000442
EAN	4015471015206

Finish	Satin Stainless Steel (SW 040)
VPE	pack of 20
DIN	DIN right and left hand
ITEM NO.	5 030818 0 04007
ITEM NO. (SAP)	5000000443
EAN	4015471021818

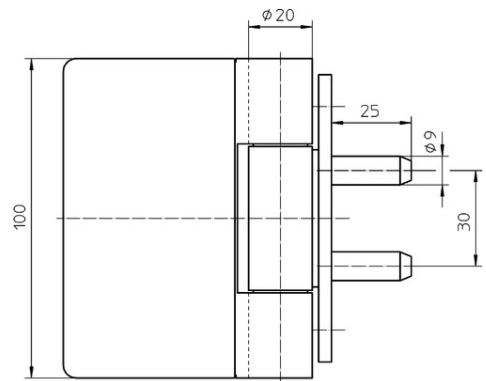

front view

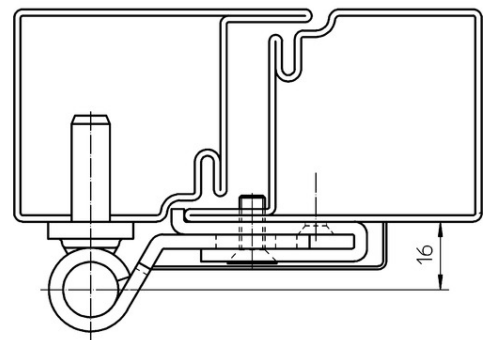

aluminium door