

VN 2929/160

for unrebated heavy-duty doors with block frames and blind frames



Product features

- for unrebated heavy-duty doors
- for block and blind frames
- internal torsion-proof pin
- concealed, maintenance-free axial-radial slide bearings

Technical data

Property	Value
Load capacity	160.0 kg
Knuckle length	160.0 mm
Knuckle Diameter	22.5 mm
Pin diameter	10.0 mm
Cutter diameter	24.0 mm
Collar ring diameter	30.0 mm
Material thickness	3.5 mm
Screws	5.0 x 50.0 mm

Notes

The load capacity mentioned above refers to the use

Quality marks



CE certification



IFT certification

Classification code

EN 1935 / EAD

4	7	7	1 ^{*1}	1	— ^{*2}	1	14
---	---	---	-----------------	---	-----------------	---	----

^{*1} Test evidence for functional doors to be achieved with full door sets and assemblies.

^{*2} depending on the finish

VARIANT VN - VN 2929/160

of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter [technical information](#).

Also available with security pin (MSTS).

Screws 4.5 x 50.0 mm can be used as an alternative for lowering the depth.

The suitability for fire doors depends on the door construction.

Installation tools

Universal milling frame

Template 5 250353 5

Combinations

VN 2900/160

Function range



fire resistance



smoke
resistance

Item versions

Finish	Satin nickelled F2 (SW 018)
VPE	pack of 2
DIN	DIN right and left hand
ITEM NO.	5 050521 0 01802
ITEM NO. (SAP)	500000613
EAN	4015471021603
Finish	Polished brassed (SW 030)
VPE	pack of 2

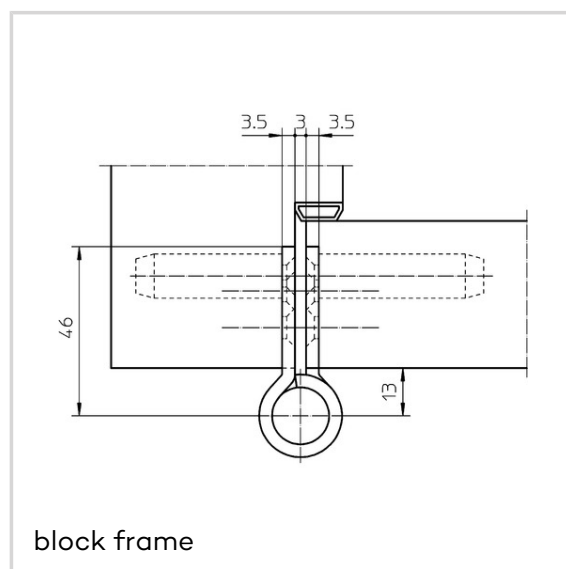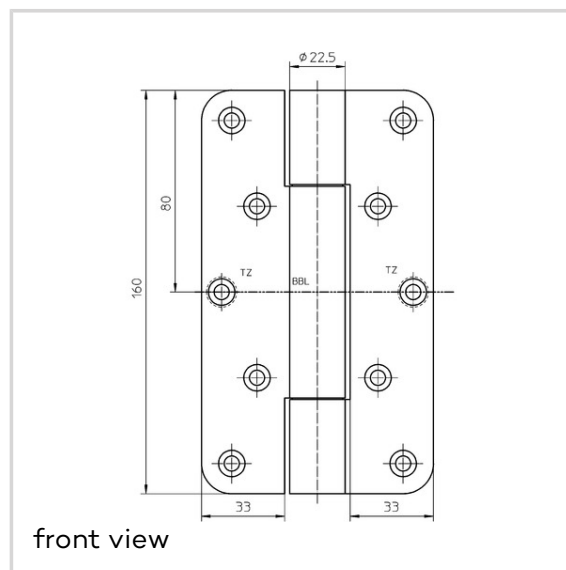

VARIANT VN - VN 2929/160

DIN	DIN right and left hand
ITEM NO.	5 050521 0 03002
ITEM NO. (SAP)	500000614
EAN	4015471006907
Finish	Satin chromed F1 (SW 037)
VPE	pack of 2
DIN	DIN right and left hand
ITEM NO.	5 050521 0 03702
ITEM NO. (SAP)	500000615
EAN	4015471025434
Finish	Satin Stainless Steel (SW 040)
VPE	pack of 2
DIN	DIN right and left hand
ITEM NO.	5 050521 0 04002
ITEM NO. (SAP)	500000616
EAN	4015471006891